

Jamicon Series : VA

Teapo Series : VA Long Life 15000hrs Series

- Endurance: 105°C, 15000hrs
- Recommended Applications: Power Supply, Projector, Network, Printer
- Corresponding product to RoHS




**Specifications**

Item	Characteristics	
Category Temperature Range	-55 ~ +105°C	
Rated Voltage Range	6.3~50VDC	
Rated Capacitance Range	47~ 1500 μF	
Capacitance Tolerance	± 20 % (120Hz , 20°C)	
Surge Voltage	Rated voltage ( V ) x 1.15	
Leakage Current ( 20°C )	Less than or equal to the value of Table , (After rated voltage applied for 2 minutes ) I : Leakage Current ( μ A ) C : Capacitance( μ F ) V : Rated Voltage Range(VDC)	
Dissipation Factor (MAX) (tan δ ) (120Hz , 20°C)	WV	6.3~50
	tan δ	0.12
Endurance	After applying rated voltage for 15000 hours at 105°C , the capacitor shall meet the following requirement .	
	Appearance	No significant damage
	Capacitance Change	Within ±20% of the initial value
	Dissipation Factor	Not more than 150% of the initial specified value
	Equivalent Series Resistance	Not more than 150% of the initial specified value
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60°C , the capacitors shall meet the requirement as Endurance .	
Resistance to Soldering Heat *	Capacitance Change	Within ±10% of the initial value
	Dissipation Factor	Not more than 130% of the initial specified value
	Equivalent Series Resistance	Not more than 130% of the initial specified value
	Leakage Current	Not more than the initial specified value

\*For any doubt about measured values, measure the leakage current again after the following voltage treatment .


Voltage treatment: Applying DC rated voltage to the capacitors for 2 hours at 105°C .

**Diagram of Dimensions**

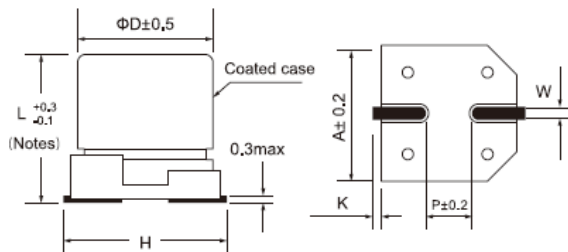

(Notes) Φ8 ~ Φ10 & 6.3x7.7=L±0.3

**Marking : case with red printing**

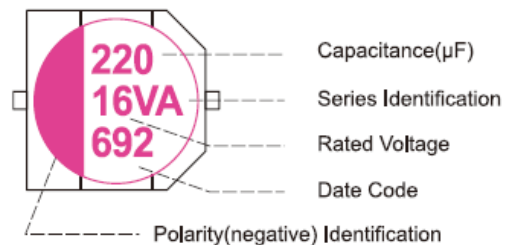

SIZE	ΦD x L	A	H(Max)	W	P	K
EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
GA9	8x9.0	8.3	10	0.9±0.2	3.1±0.2	0.7±0.2
GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.7±0.2
HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.7±0.2
HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.7±0.2

**Multiplier for Ripple Current**

Frequency(HZ)	120 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F ≤ 500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series : VA

Teapo Series : VA

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated ( Surge ) Voltage(V)	Capacitance ( $\mu$ F)	SIZE $\Phi$ DxL(mm)	RIPPLE (mA/rms,105 °C 100KHz)	ESR (m $\Omega$ ,20°C 100KHz)	LC ( $\mu$ A max/2min)
6.3(7.25)	220	6.3x5.8	2400	50	300
	470	6.3x7.7	2600	45	592
	820	8x10.4	3200	35	1033
	1500	10x10.2	4500	25	1890
10(11.5)	120	6.3x5.8	2000	45	300
	330	6.3x7.7	2400	40	660
	470	8x10.4	2800	35	940
	820	10x10.2	3500	35	1640
16(18.4)	100	6.3x5.8	2000	50	320
	180	6.3x7.7	2500	40	576
	330	8x10.4	3000	35	1056
	470	10x10.2	3200	30	1504
25(28.75)	47	6.3x5.8	1100	90	300
	100	6.3x7.7	1800	70	500
	220	8x10.4	2600	55	1100
	330	10x12.2	2800	50	1650
35 ( 40.25 )	100	8x9	1500	40	700
		8x10.4	1800	30	700
	220	10x10.2	2000	25	1540
	270	10x12.2	2500	24	1890
50 ( 57.5 )	47	8x10.4	1700	50	470
	100	10x10.2	1800	45	1000
	150	10x12.2	2100	42	1500