

Jamicon Series : FT

Teapo Series : FT

125°C/2000hrs&Low ESR Series


- Endurance:125°C,2000hrs
- Recommended Applications:Power Supply,Home appliances,Charger,Inverter
- Corresponding product to RoHS




Specifications

Item	Characteristics	
Category Temperature Range	-55 ~ +125°C	
Rated Voltage Range	6.3~80VDC	
Rated Capacitance Range	10~ 1000 μF	
Capacitance Tolerance	± 20 % (120Hz , 20°C)	
Surge Voltage	Rated voltage (V) x 1.15	
Leakage Current (20°C)	I ≤ 0.2CV or 300(μ A)whichever is greater (After rated voltage applied for 2 minutes) I : Leakage Current (μ A) C : Capacitance(μ F) V : Rated Voltage Range(VDC)	
Dissipation Factor (MAX) (tan δ) (120Hz ,20°C)	WV	6.3~80
	tan δ	0.12
Endurance	After applying rated voltage for 2000 hours at 125°C , the capacitor shall meet the following requirement °	
	Appearance	No significant damage
	Capacitance Change	Within ±20% of the initial value
	Dissipation Factor	Not more than 150% of the initial specified value
	Equivalent Series Resistance	Not more than 150% of the initial specified value
Leakage Current	Not more than the initial specified value	
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60°C , the capacitors shall meet the requirement as Endurance °	
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance	

Diagram of Dimensions

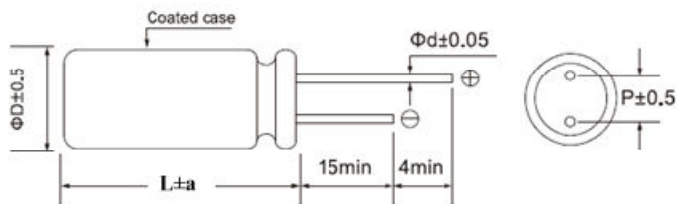

Marking : case with red printing

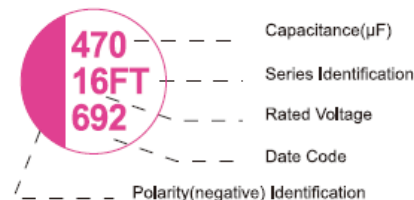

SIZE	ΦD x L	P	Φd	a
E06	6.3x6	2.5	0.5	1.5
E08	6.3x8	2.5	0.5or0.6	1.0
E15	6.3x15	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
G20	8x20	3.5	0.6	1.5
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0
H20	10x20	5.0	0.6	1.5

Multiplier for Ripple Current

Frequency(HZ)	120 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F ≤ 500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series : FT

Teapo Series : FT

■Dimensions, Rated Ripple Current, Equivalent Series Resistance

Rated (Surge Voltage(V)	Capacitance (μF)	SIZE Φ DxL(mm)	RIPPLE(mA/rms,100k Hz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx : 100%	Tx : 100%		
6.3 (7.2)	180	6.3x6	537	1700	45	300
	220	6.3x6	537	1700	45	300
	270	6.3x6	810	2560	45	340
	330	6.3x6	810	2560	45	415
	470	6.3x8	810	2560	35	592
		8x8	810	2560	15	592
	560	8x8	1332	4210	15	705
	680	8x8	1721	5440	15	856
	820	8x8	1721	5440	15	1033
	1000	8x11.5	1721	5440	15	1260
10 (11.5)	180	6.3x8	537	1700	45	360
	220	8x8	810	2560	35	440
	270	8x8	810	2560	35	540
	330	6.3x8	537	1700	45	660
		8x8	810	2560	35	660
	470	8x8	810	2560	35	940
	560	8x8	810	2560	35	1120
	680	8x11.5	1332	4210	15	1360
16 (18.4)	82	6.3x8	512	1620	50	300
	100	6.3x8	512	1620	50	320
	120	6.3x8	670	2120	50	384
	150	6.3x8	670	2120	50	480
	180	8x8	1151	3640	20	576
		8x8	1151	3640	20	704
	270	8x11.5	1493	4720	20	864
	330	8x11.5	1151	3640	20	1056
		10x12.5	1493	4720	16	1056
	470	10x12.5	1493	4720	16	1504
20(23)	47	6.3x8	458	1450	60	300
	56	6.3x8	598	1890	60	300
	68	6.3x8	598	1890	60	300
	82	6.3x8	1050	3320	60	328
	100	8x11.5	1050	3320	24	400
	120	8x11.5	1367	4320	24	480
	150	8x11.5	1367	4320	24	600
25(28.75)	10	6.3x8	458	1450	60	300
	22	6.3x8	458	1450	60	300
	33	6.3x8	458	1450	60	300
	47	6.3x8	598	1890	60	300
	56	6.3x8	598	1890	60	300
	68	6.3x8	1050	3320	60	340
	82	6.3x8	1050	3320	60	410
	100	8x11.5	1050	3320	24	500
		10x12.5	1367	4320	20	500
	150	8x11.5	1367	4320	24	750
	220	8x11.5	1050	3320	24	1100
	270	8x15	1367	4320	20	1350
	330	10x12.5	1367	4320	20	1650

Rated (Surge Voltage(V)	Capacitance (μF)	SIZE Φ DxL(mm)	RIPPLE(mA/rms,100k Hz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx : 100%	Tx : 100%		
35 (40.25)	47	6.3x8	379	1200	40	329
	220	6.3x15	790	2500	35	1540
	100	8x8	632	2000	30	700
	150	8x11.5	727	2300	28	1050
	220	10x10.5	758	2400	35	1540
		8x15	1106	3500	25	2310
	330	8x20	1264	4000	22	4760
		10x16	948	3000	30	4760
	1000	10x20	1264	4000	25	7000
		22	6.3x8	348	1100	60
50 (57.5)	47	8x8	379	1200	55	470
	100	10x10.5	695	2200	45	1000
	220	10x16	885	2800	35	2200
63 (72.45)	47	8x8	348	1100	65	592
	100	8x15	632	2000	50	1260
		10x12.5	632	2000	55	1260
	220	10x20	1138	3600	45	2772
		10	6.3x8	284	900	80
80 (92)	22	8x8	316	1000	75	352
	56	10x12.5	632	2000	50	896
	100	10x16	695	2200	40	1600
	150	10x20	1200	3800	35	2400