


Jamicon Series : TE

Teapo Series : SY Low impedance · Long life Series




- Features: Low Impedance , high permissible ripple current at high frequency and long life than SC
- Recommended Applications :Used switching regulator applications in computers.
Especially for high frequency.
- Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40 ~ +105°C	
Rated Voltage Range	6.3 ~ 100VDC	
Rated Capacitance Range	10 ~ 15000 μ F	
Capacitance Tolerance	$\pm 20\%$ (120Hz , 20°C)	
Leakage Current (20°C)	I=0.01CV or 3 μ A whichever is greater. (After rated voltage applied for 2 minutes) I : Max. leakage current (μ A), C : Nominal capacitance (μ F), V : Rated voltage (V)	
Dissipation Factor(MAX) (tan δ) (120Hz , 20°C)	WV	6.3 10 16 25 35 50 63 100
	tan δ	0.22 0.19 0.16 0.14 0.12 0.10 0.09 0.08
When nominal capacitance is over 1000 μ F, tan δ shall be added 0.02 to the listed value with increase of every 1000 μ F.		
Low Temperature Stability Impedance Ratio (MAX)	WV	6.3 10 16 25 35 50 63 100
	Z(120Hz)	4 3 2 2 2 2 2 2
	Z-25°C / Z+20°C	8 6 4 3 3 3 3 3
Endurance	After applying rated voltage with rated ripple current for 3000~ 6000 hours at 105°C, the capacitors shall meet the following requirements.	
	Capacitance change	Within $\pm 25\%$ of initial value
Shelf Life	D.F. (tan δ)	Not more than 200% of specified value
	Leakage current	Not more than the specified value
	D Φ	5~6.3 Φ 8~10 Φ x12.5 10x15~12 Φ 12.5~18 Φ
	life(hours)	3000 hrs 4000 hrs 5000 hrs 6000 hrs
	After placed at 105°C without voltage applied for 1000 hours, the capacitors shall meet the same requirement as Endurance.	

■ Dimensions [mm]

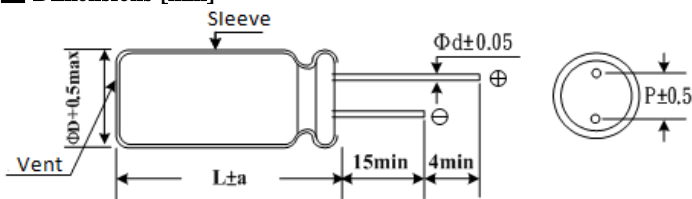

Φ D	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φ d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1 K	10 K	100 K
10~ 180 μ F	0.40	0.75	0.90	1.00
220 ~ 560 μ F	0.50	0.85	0.94	1.00
680 ~1800 μ F	0.60	0.87	0.95	1.00
2200 ~ 3900 μ F	0.75	0.90	0.95	1.00
≥ 4700 μ F	0.85	0.95	0.98	1.00

Jamicon Series : TE

Teapo Series : SY

■ STANDARD RATINGS

Rated Voltage (Surage Voltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω ,20°C) (100KHz)	Rated Voltage (Surage Voltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω ,20°C) (100KHz)
6.3V (8)	150	5x11	210	0.580	16V(20)	120	6.3x11	340	0.220
	330	6.3x11	340	0.220		220	6.3x11	469	0.185
	470	6.3x11	510	0.160		330	8x11	582	0.150
	680	8x11	640	0.130		470	8x11	640	0.130
	820	10x12.5	865	0.080		470	*8x15	840	0.087
	1000	8x15	840	0.087		470	8x20	950	0.078
	1200	8x20	1050	0.069		470	*10x12.5	865	0.080
	1200	10x16	1210	0.060		470	10x16	1210	0.060
	1500	8x20	1050	0.069		680	8x20	1050	0.069
	1500	*10x16	1210	0.060		680	10x16	1210	0.060
	1500	10x20	1400	0.046		1000	8x20	1050	0.069
	1800	13x16	1450	0.049		1000	*10x16	1210	0.060
	2200	*10x20	1400	0.046		1000	10x20	1400	0.046
	2200	10x25	1650	0.042		1000	13x16	1450	0.049
	2700	10x30	1910	0.031		1200	10x25	1650	0.042
	2700	16x16	1940	0.042		1200	10x30	1910	0.031
	3300	10x25	1650	0.042		1500	13x20	1900	0.035
	3300	13x20	1900	0.035		1500	16x16	1940	0.042
	3900	13x25	2230	0.027		2200	13x25	2230	0.027
	3900	18x16	2210	0.043		2200	18x16	2210	0.043
4700	13x30	2650	0.024	2700	13x30	2650	0.024		
5600	13x35	2880	0.020	2700	16x20	2530	0.027		
5600	16x20	2530	0.027	3300	16x20	2530	0.027		
6800	13x40	3350	0.017	3300	13x35	2880	0.020		
6800	16x25	2930	0.021	3900	13x40	3350	0.017		
6800	18x20	2860	0.026	3900	16x25	2930	0.021		
8200	16x32	3450	0.017	3900	18x20	2860	0.026		
10000	16x36	3610	0.015	4700	16x32	3450	0.017		
10000	18x25	3140	0.019	4700	18x25	3140	0.019		
12000	18x32	4170	0.015	5600	16x36	3610	0.015		
15000	18x36	4220	0.014	5600	18x32	4170	0.015		
10V (13)	100	5x11	210	0.580	25V (32)	47	5x11	210	0.580
	220	6.3x11	340	0.220		100	6.3x11	340	0.220
	470	8x11	640	0.130		150	8x11	640	0.160
	680	8x15	840	0.087		220	8x11	640	0.130
	820	10x12.5	865	0.080		330	8x15	840	0.087
	1000	8x20	1050	0.069		330	10x12.5	865	0.080
	1000	10x16	1210	0.060		470	8x20	1050	0.069
	1200	10x20	1400	0.046		470	*10x12.5	1050	0.070
	1500	10x25	1650	0.042		470	10x16	1210	0.060
	1500	13x16	1450	0.049		680	10x20	1400	0.046
	2200	10x30	1910	0.031		680	13x16	1450	0.049
	2200	13x20	1900	0.042		820	10x25	1650	0.042
	2200	16x16	1940	0.042		1000	10x30	1910	0.031
	2700	18x16	2210	0.043		1000	13x20	1900	0.035
	3300	10x30	1910	0.031		1000	16x16	1940	0.042
	3300	13x25	2230	0.027		1200	18x16	2210	0.043
	3900	13x30	2650	0.024		1500	*13x20	1900	0.035
	3900	16x20	2530	0.027		1500	13x25	2230	0.027
	4700	13x35	2880	0.020		1800	13x30	2650	0.024
	5600	13x40	3350	0.017		1800	16x20	2530	0.027
5600	16x25	2930	0.021	2200	13x35	2880	0.020		
5600	18x20	2860	0.026	2200	18x20	2860	0.026		
6800	16x32	3450	0.017	2700	13x40	3350	0.017		
6800	18x25	3140	0.019	2700	16x25	2930	0.021		
8200	16x36	3610	0.015	3300	16x32	3450	0.017		
8200	18x32	4170	0.015	3300	18x25	3140	0.019		
10000	16x40	4080	0.013	3900	18x32	4170	0.015		
10000	18x36	4220	0.014	4700	18x36	4220	0.014		
12000	18x40	4280	0.012	5600	18x40	4280	0.012		
16V (20)	100	5x11	210	0.580					
		6.3x11	250	0.230					

Jamicon Series : TE

Teapo Series : SY

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω ,20°C) (100KHz)	Rated Voltage (SurageVoltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω ,20°C) (100KHz)
35V (44)	33	5x11	210	0.580	50V (63)	1200	18x25	2740	0.026
	47	6.3x11	275	0.390		1500	16x36	3150	0.019
	56	6.3x11	340	0.220		1800	16x40	3710	0.016
	68	6.3x11	500	0.170			18x32	3635	0.021
	82	6.3x11	540	0.160		2200	18x36	3680	0.017
	100	8x11	580	0.150		2700	18x40	3800	0.014
	150	8x11	640	0.130			15	5x11	55
	220	*8x15	840	0.087	63V (79)	33	6.3x11	115	1.2
		10x12.5	865	0.080		56	8x12	232	0.63
	270	8x20	1050	0.069		82	8x15	300	0.45
		*10x16	1210	0.060			10x12.5	288	0.43
	330	10x20	1400	0.046		120	8x20	362	0.33
		10x20	1400	0.046			10x16	357	0.31
	470	13x16	1450	0.049		180	10x20	466	0.21
		10x25	1650	0.042			13x16	466	0.23
	680	10x30	1910	0.031		220	10x25	531	0.2
		13x20	1900	0.035			10x30	663	0.15
		16x16	1940	0.042		270	13x20	690	0.16
	820	13x20	1900	0.035			16x16	795	0.14
		1000	13x25	2230		0.027	330	13x25	784
	18x16		2210	0.043		390		18x16	920
	1200	13x30	2650	0.024		470	13x30	905	0.1
		16x20	2530	0.027			16x20	1040	0.091
	1500	13x35	2880	0.020		560	13x35	1050	0.083
		13x40	3350	0.017			16x25	1250	0.073
	1800	16x25	2930	0.021		680	13x40	1180	0.071
		18x20	2860	0.026			18x20	1240	0.08
	2200	16x32	3450	0.017		820	16x32	1570	0.054
18x25		3140	0.019	18x25			1490	0.057	
2700	16x36	3610	0.015	1000		16x36	1790	0.045	
	18x32	4170	0.015			18x32	1630	0.047	
3300	16x40	4080	0.013	1200		16x40	2020	0.04	
	18x36	4220	0.014			100V (125)	22	6.3x11	200
3900	18x40	4280	0.012	27			8x12	232	0.63
50V (63)	10	5x11	135	1.200			39	8x15	300
	22	5x11	180	0.700	47		10x12.5	288	0.43
	33	6.3x11	245	0.490	56		8x20	362	0.33
	47	6.3x11	300	0.520	68		10x16	357	0.31
	56	6.3x11	320	0.300	82		10x20	466	0.21
	100	8x11	555	0.170			13x16	466	0.23
	120	8x15	730	0.120	100		10x25	531	0.2
	150	10x12.5	760	0.120			120	10x30	663
	180	8x20	910	0.091	150		13x20	690	0.16
	220	10x16	1050	0.084			180	16x16	795
	270	10x20	1220	0.060	220		13x25	784	0.12
		13x16	1260	0.061			18x16	920	0.12
	330	*10x20	1400	0.058	270		13x30	905	0.1
		10x25	1440	0.055			16x20	1040	0.091
	470	10x30	1690	0.043	330		13x35	1050	0.083
		13x20	1660	0.045			16x25	1250	0.073
	560	16x16	1690	0.055	390		13x40	1180	0.071
		13x25	1950	0.034			18x20	1240	0.08
	680	18x16	1930	0.054	470		16x32	1570	0.054
		13x30	2310	0.030			18x25	1490	0.057
	820	13x35	2510	0.025	560		16x36	1790	0.045
		16x20	2210	0.034			18x32	1630	0.047
	1000	13x40	2920	0.021	270		16x40	2020	0.04
		16x25	2555	0.025	330		18x36	2020	0.04
	1200	18x20	2490	0.036	470		18x40	2330	0.036
		16x32	3010	0.022					