

Jamicon Series : VQ

Teapo Series : VQ 125°C/2000hrs&Low ESR


- Endurance:125°C,2000hrs
- Recommended Applications: High temperature resistant products
- Corresponding product to RoHS

Specifications


Item	Characteristics	
Category Temperature Range	-55 ~ +125°C	
Rated Voltage Range	2.5~25VDC	
Rated Capacitance Range	22~ 1500 μF	
Capacitance Tolerance	± 20 % (120Hz , 20°C)	
Surge Voltage	Rated voltage (V) x 1.15	
Leakage Current (20°C)	Less than or equal to the value of Table , (After rated voltage applied for 2 minutes) I : Leakage Current (μ A) C : Capacitance(μ F) V : Rated Voltage Range(VDC)	
Dissipation Factor (MAX) (tan δ) (120Hz ,20°C)	WV	2.5~25
	tan δ	0.12
Temperature characteristic Impedance ratio (MAX)	Z(100KHz) / WV	2.5 ~ 25V
	Z-25°C / Z+20°C	≤ 1.15
	Z-55°C / Z+20°C	≤ 1.25
Endurance	After applying rated voltage for 2000 hours at 125°C , the capacitor shall meet the following requirement °	
	Appearance	No significant damage
	Capacitance Change	Within ±20% of the initial value
	Dissipation Factor	Not more than 150% of the initial specified value
	Equivalent Series Resistance	Not more than 150% of the initial specified value
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60°C , the capacitors shall meet the requirement as Endurance °	
	Capacitance Change	Within ±10% of the initial value
	Dissipation Factor	Not more than 130% of the initial specified value
	Equivalent Series Resistance	Not more than 130% of the initial specified value
	Leakage Current	Not more than the initial specified value
Resistance to Soldering Heat *	Capacitance Change	Within ±10% of the initial value
	Dissipation Factor	Not more than 130% of the initial specified value
	Equivalent Series Resistance	Not more than 130% of the initial specified value
	Leakage Current	Not more than the initial specified value

*For any doubt about measured values, measure the leakage current again after the following voltage treatment °
Voltage treatment: Applying DC rated voltage to the capacitors for 2 hours at 125°C °

Diagram of Dimensions

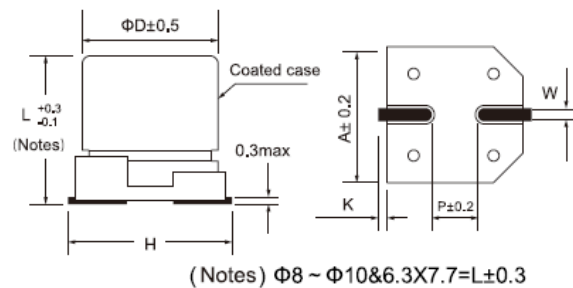

Marking : case with red printing

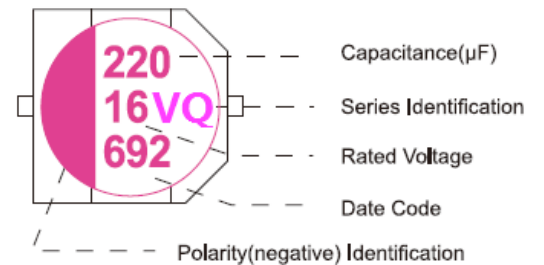

SIZE	Φ D x L	A	H(Max)	W	P	K
CA1	5x5.8	5.3	6.5	0.65±0.15	1.5±0.2	0.35+0.15/-0.2
EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.7±0.2
HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.7±0.2
HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.7±0.2

Multiplier for Ripple Current

Frequency(HZ)	120 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F ≤ 500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series : VQ

Teapo Series : VQ

Dimensions, Rated Ripple Current, Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μ F)	SIZE Φ DxL(mm)	RIPPLE(mA/rms,100kHz)		ESR ($m\Omega$,20°C 100kHz)	LC (μ A max/2min)	Rated (Surge) Voltage(V)	Capacitance (μ F)	SIZE Φ DxL(mm)	RIPPLE(mA/rms,100kHz)		ESR ($m\Omega$,20°C 100kHz)	LC (μ A max/2min)		
			Tx : 125°C	Tx : 105°C						Tx : 125°C	Tx : 105°C				
2.5 (2.88)	220	6.3x5.8	790	2500	40	300	16(18.4)	47	6.3x5.8	500	1600	55	300		
	390	6.3x7.7	859	2720	30	300		82	6.3x7.7	764	2420	30	300		
	470	6.3x7.7	859	2720	30	300		100	6.3x7.7	764	2420	30	320		
	1000	8x10.4	1248	3950	25	500		150	8x10.4	1100	3490	25	480		
	1500	10x10.2	1264	4000	20	750		220	8x10.4	1100	3490	25	704		
10x12.2		1740	5500	20	750	270		8x10.4	1100	3490	25	864			
4(4.6)	100	6.3x5.8	445	2450	35	300		330	10x12.2	1560	5050	18	1056		
	330	6.3x7.7	837	2650	35	300		390	8x10.4	948	3000	25	1248		
	560	8x10.4	1250	3950	25	448		470	10x10.2	980	3100	20	1504		
	820	8x10.4	1250	3950	25	656			10x12.2	1600	5050	18	1504		
		10x12.2	1738	5500	20	656		560	10x12.2	1600	5050	18	1792		
	1200	10x10.2	1265	4000	20	960		680	10x12.2	1600	5050	18	2176		
		10x12.2	1738	5500	20	960		820	10x12.2	1600	5050	18	2624		
6.3(7.25)		47	5x5.8	436	1380	50		300	20(23)	22	6.3x5.8	520	1650	55	300
	68	6.3x5.8	758	2400	40	300		47		6.3x7.7	630	2000	50	300	
	100	5x5.8	436	1380	50	300	100	8x10.4		1050	3320	30	480		
		6.3x5.8	758	2400	35	300	150	10x12.2		1333	4220	25	600		
	220	6.3x5.8	758	2400	35	300	25(28.75)	22	6.3x5.8	284	900	65	300		
		6.3x7.7	840	2650	30	300			6.3x7.7	568	1800	50	300		
	330	6.3x5.8	760	2400	35	415		47	6.3x5.8	410	1300	65	300		
		6.3x7.7	840	2650	35	415			6.3x7.7	568	1800	50	300		
	470	6.3x7.7	840	2650	30	592		68	6.3x7.7	568	1800	50	340		
		8x10.4	1140	3610	25	592		100	8x10.4	1050	3320	40	500		
	680	8x10.4	11740	3610	25	857		180	10x10.2	980	3100	35	900		
		10x10.2	1153	3650	20	857		220	8x10.4	1050	3320	40	1100		
	820	10x10.2	1153	3650	20	1033		270	10x10.2	1050	3320	35	1350		
		10x12.2	1740	5500	25	1033		330	10x12.2	1106	3500	33	1650		
	10(11.5)	22	5x5.8	400	1270	50		300		470	10x10.2	1106	3500	20	940
33		5x5.8	400	1270	50	300		10x12.2			1680	5300	20	940	
47		5x5.8	400	1270	50	300	560	10x12.2		1680	5300	18	1120		
56		6.3x5.8	710	2250	40	300	1000	10x12.2		1680	5300	18	2000		
100		6.3x5.8	710	2250	40	300		150		6.3x7.7	808	2560	33	300	
		6.3x7.7	808	2560	33	300				390	8x10.4	955	3020	28	780
150		6.3x7.7	808	2560	35	300		470			10x10.2	1106	3500	20	940
390		8x10.4	955	3020	28	780				560	10x12.2	1680	5300	20	940
		10x10.2	1106	3500	20	940		1000			10x12.2	1680	5300	18	1120
470		10x12.2	1680	5300	20	940				1000	10x12.2	1680	5300	18	2000
		560	10x12.2	1680	5300	18		1120							
1000		10x12.2	1680	5300	18	2000									