


Part Number System

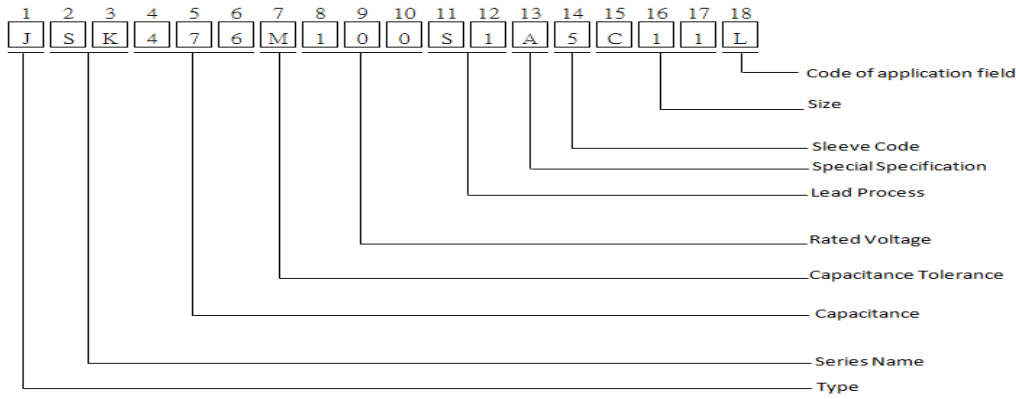

Code 1

Type

Code	Model Type
J	Jamicon Radial Type (PET sleeve)
K	Teapo Radial Type (PET sleeve)
V	SMD (V-chip) Type (Nylon coating)
S	TEAPO Snap-in Type (PET sleeve)
T	JAMICON Snap-in Type (PET sleeve)
H	JAMICON Snap-in Type (No Insulating base, PET sleeve )
P	TEAPO Radial Type / SMD Type Conductive Polymer Aluminum Solid Capacitors
R	TEAPO Radial Type / SMD Type Conductive Polymer Hybrid Capacitors
N	Screw Type(PVC sleeve)
B	Radial Type special for CP line( PET sleeve)
M	Radial Type 8 φ pitch =2.5mm(PET sleeve)
G	G-LUXON Radial Type (PET sleeve)
Y	JAMICON Radial Type / SMD Type Conductive Polymer Aluminum Solid Capacitors
W	JAMICON Radial Type / SMD Type Conductive Polymer Hybrid Capacitors
Z	Teapo Snap-in Type (No Insulating base, PET sleeve ),the last code "0" is for G-LUXON Snap-in Type (No Insulating base, PET sleeve )

Code 2~3

Series Name (as content page 2 to page 4)

Code 4~6

Capacitance

Capacitance(uf)	0.47	4.7	47	470	4700	47000	470000	4700000	47000000	470000000
product code	474	475	476	477	478	479	47A	47B	47C	47D

Code 7

Capacitance Tolerance

A : - 8~ + 32%	B : - 5~ + 10%	C : + 10~ + 30%	D : - 40~ + 0%	W : - 15~ + 0%	X : - 15~ + 5%
G : - 30~ + 0%	H : - 5~ + 15%	I : - 20~ + 0%	J : - 5~ + 5%	Q : - 10~ + 30%	R : - 0~ + 20%
M : - 20~ + 20%	N : - 30~ + 30%	O : - 20~ + 10%	P : - 0~ + 30%	K : - 10~ + 10%	L : - 15~ + 15%
S : - 0~ + 50%	T : - 10~ + 50%	U : - 10~ + 75%	V : - 10~ + 20%	E : - 12~ + 20%	F : - 5~ + 20%
Y : - 10~ + 150%	Z : - 20~ + 80%				

Code 8~10

Rated Voltage

Rated Voltage(WV)	2.5	5	6.3	63	100	450
product code	2R5	005	6R3	063	100	450

Code 11~12

Lead Process

Code processing form	Code 11	Code 12	Description
Standard	A	1	Screw type standard type
	S	0	Standard SMD type
		1	Standard Dip & Snap-in type
Ammo tape	T	1	Standard ammo tape (pitch 5mm for dia .~ 13mm)
		2	Ammo tape with straight lead (available for dia. 4~8mm)
		4	Ammo formed tape with pitch 2.5mm (available for dia.4~5mm)
Reel tape	R	1	Standard reel tape (pitch 5mm for dia.~ 10mm)
		2	Reel tape with straight lead (available for dia. 4~8mm)
		3	Reel formed tape with pitch 2.5mm (available for dia.4~5mm )
Straight cut	C	3	Straight cut lead with L : 3.2+/-0.5mm
		5	Straight cut lead with L : 4.0+/-0.5mm
		7	Straight cut lead with L : 5.0+/-0.5mm
Kink(Crimp)cut	K	2	Kink cut lead with L : 4.5+/-0.5mm
Formed cut	F	6	Forming cut lead with L : 4.0+/-0.5 (Pitch : 5mm)

Code 13 Special Specification

A	Standard	J	S-protection	S	spacer special DIP special	2	Life & ESR special
B	DF (tanδ)special	K	Above life specified in catalog	T	length of body special fortolerance	3	Life & Impedance special
C	ESR special	L	Pins or Wire diameter	U	Pack special	4	Life & Ripple current
D	Impedance special	M	Customer requirements	V	Sleeve special	5	Life & LC special
E	Ripple current special	N	Pitch special	W	Capacitance special	6	life & rubber cover or
F	LC special	O	LC & ESR or Impedance special	X	DF & LC & ESR or Impedance special	7	DF & ESR or Impedance special
G	GUM or special for capacitor cover plate or non-salient point in bottom	P	Under life specified in catalog	Y	RC & LC & ESR or Impedance special	8	DF & RC special
H	Customer requirements	Q	DF & Ripple current & ESR or Impedance special	Z	Frequency & ESR or Impedance special	9	DF & LC special
I	RC & LC special	R	Shelf is 1000Hrs	1	Life & DF special	0	RC & ESR or Impedance

Code 14 Sleeve Code ( please contact us if the sleeve code in the form cannot corresponding with your requirement. )

代碼	Color	JAMICON	TEAPO
1	Dark blue with white	/	SK
5	Black with white printing	NK,SK,TE,TQ,TT,TV,TP,TR,TW,SA,RV,HF,HM,HS,HT,LS,HV,HX,WB,WH,LB,HB,KP,MP,WP,QP,RP,XP,JP,EP,UF	SH,SG,SP,SB,SY,SJ,RN,SQ,AK,ST,TA,SU,TB,LH,LG,LJ,LF,LQ,LM,TE,LS,LK,TT,S5,S7,H5,H7,KP,WP,QP,MP,XP,JP,MA,TP,LA,GA,GB
6	Black with golden printing	TU,WF	TC
C	Green with golden printing	SL,WL,TF	SC,WL
H	Royal blue with golden	/	SZ
N	SMD standard pack & Polymer(Hybrid) type	CA,CD,CE,CJ,CK,CN,CU,CS,CW,CT,CH,CL,CF,CZ,CB,CP,VP,VC,VB,VS,VA,VD,VQ,FG,FR,FF,FL,FS,FP,FH,FC,FB,FT,YA,YX,YD,YS	XV,LV,MV,AV,PV,RV,WV,GV,FV,SV,DV,YV,EV,XV,HV,NV,VP,VC,VB,VS,VA,VD,VQ,FG,FR,FF,FL,FS,FP,FH,FC,FB,FT,YA,YX,YD,YS
M	Black with blue printing	SH,ST,TK,TC	/
A	Green with black printing	LK,WB	LL
9	Green with silvery printing	MZ	MZ
B	Brown with white printing	TH,TL,HL,LL,HV	TH,GC,GD
Z	Brown with silver printing	TX,TJ,	TX
7	Green with white printing	LT,HT	/

Code 15~17 Case Size (Please contact us if the case size is required and not shown in the table.)

Code 15 Diameter

Code	A	B	C	D	E	F	G	8	H	9
Case size	3	4	5	5.5	6.3	7.3	8	8.2	10	10.2
Code	J	K	L	6	M	N	7	P	Q	R
Case size	12	12.5	13	14.5	16	18	18.5	20	22	25
Code	S	T	U	V	W	X	Y	Z	1	
Case size	30	35	40	45	51	64	77	90	101	

Code 16~17 Length

For ECAP-DIP & POLYMER(HYBRID)-DIP & SNAP-IN & SCREW TYPE :

Code	05	07	09	10	1A	11	1B	12	1C	13
Length	05	07	09	10	10.5	11	11.5	12	12.5	13
Code	14	15	16	17	18	20	25	30	3B	32
Length	14	15	16	17	18	20	25	30	31.5	32
Code	35	3F	36	40	45	50	55	60	65	70
Length	35	35.5	36	40	45	50	55	60	65	70
Code	75	80	90	96	A0	B5	C1	D0	E4	F5
Length	75	80	90	96	100	115	121	130	144	155

For V-CHIP SMD

Code	01	02	03	04	05	06	07	08
Length	5.4	6.2	10.2	7.7	13.5	16、16.5	12.5	5.8

For POLYMER(HYBRID) SMD

Code	A1	A2	A3	A4	A5	A6	A7	A8	A9
Length	5.8	6.0	6.7	7.7	10.2	10.4	12.0	12.2	9.0

Code 18 Code of application field

H: Intelligent instrument	R:Medical	X:Weekly date code	6:Industrial equipment / inverter
K:TEAPO	S:Auto grade	0:G.LUXON	L : JAMICON